



1WTP THERMOPLASTIC HYDRAULIC HOSE

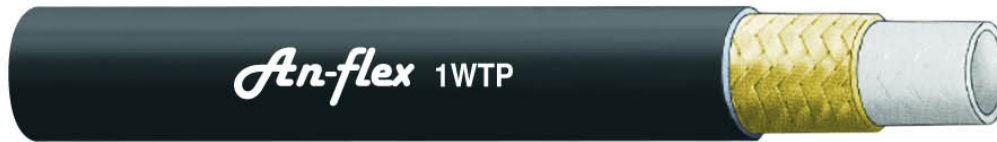

HOSE SIZE			1.D.	O.D.	OPERATING PRESSURE		BURST PRESSURE		BEND RADIUS
Type	INCH	DN	MM	MM	BAR	PSI	BAR	PSI	MM
1WTP-03	3/16	5	4.7	9.5	275	4000	1100	16000	75
1WTP-04	1/4	6	6.4	11.7	234	3400	938	13600	100
1WTP-05	5/16	8	8.0	13.6	216	3125	862	12500	114
1WTP-06	3/8	10	9.5	15.2	193	2800	772	11200	127
1WTP-08	1/2	12	12.7	18.4	172	2500	690	10000	178
1WTP-10	5/8	16	15.9	22.6	129	1875	517	7500	203
1WTP-12	3/4	19	19.0	25.6	108	1560	430	6240	240
1WTP-16	1	25	25.4	32.7	86	1250	345	5000	305

- Core: Polyester Elastomer (PE-E) or Nylon (PA).
- Reinforcement: 1 high tensile steel wire braid
- Cover: Polyurethane (PUR).
- Working Temperature: -40 °C to +90 °C.
- Colour: Black, others upon request.

2WTP THERMOPLASTIC HYDRAULIC HOSE

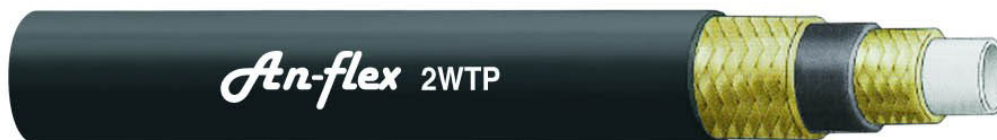

HOSE SIZE			1.D.	O.D.	OPERATING PRESSURE		BURST PRESSURE		BEND RADIUS
Type	INCH	DN	MM	MM	BAR	PSI	BAR	PSI	MM
2WTP-04	1/4	6	6.4	13.8	379	5500	1517	22000	100
2WTP-05	5/16	8	8.0	15.2	322	4675	1290	18700	110
2WTP-06	3/8	10	9.6	17.5	303	4400	1214	17600	127
2WTP-08	1/2	12	12.7	21.1	266	3850	1062	15400	178
2WTP-10	5/8	16	16.0	24.6	209	3025	834	12100	203
2WTP-12	3/4	19	19.0	28.4	171	2475	683	9900	241
2WTP-16	1	25	25.4	34.5	152	2200	607	8800	305

- Core: Polyester Elastomer (PE-E) or Nylon (PA).
- Reinforcement: 2 high tensile steel wire braid
- Cover: Polyurethane (PUR).
- Working Temperature: -40 °C to +90 °C.
- Colour: Black, others upon request.